




LUMINUX LED X-RAY FILM VIEWER

LH- 25 & LH-48 (Portable & Table Model)

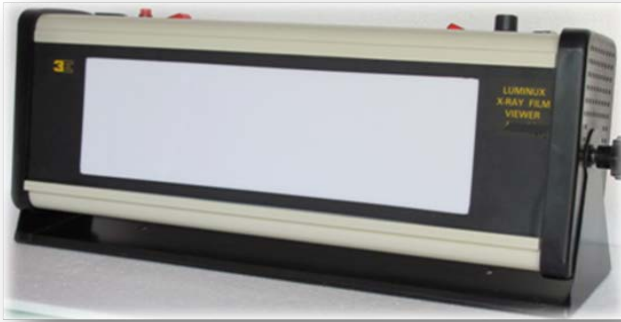

Keep the Light On ...

Very bright Light over 400,000 lux



Luminux X-ray Film Viewers have gone **Green to Save the Environment** with Trendy looks, LED light source, Corrosion resistant Body & Compact size.

Removable stand when not require for using as a Table Top model. Provided with step-less infinite brightness control.

Salient Features:

- Up to 80% saving in power consumption
- Array of special grade LED lamps
- low screen temperature & less emission
- Compact & light weight
- With Foot switch & sliding shutters
- Non corrosive Aluminum body
- View density up to 4.5
- Uniform brightness on entire screen.
- No Warm-up Time
- Shock resistance
- High speed cooling fan
- Reading light

Luminux X-ray Film Viewers built according ASTM E1390 ASME Sec. V Art.2 T-234 EN25580

TECHNICAL SPECIFICATIONS

Specifications	Model LH-25	Model LH-48
Light Intensity	120.000 cd/mq ²	
Dimension	510 X 105 X 200 mm (LH25)	660 x 120 x 260 mm (LH-SP48)
Viewing Area	100 X 300 mm	100 X 480 mm
Weight	6,9 Kg (15lbs)	11,8 Kg (26 lbs.)
Control	10-100% continuous	
Housing	Powder Coated Aluminum Body	
Cooling	High Speed Cooling fans	
Power Input	230V AC 50/60Hz (110 Volts available)	
Operating Temperature	-10° to 50° C - 80% Humidity	

*Specifications are subjected to change without notice. *Under Standard test conditions.

Standard package include

Film Viewer, Foot Switch, Sliding Shutter and Operating manual



3E NDT Via Roganti 16 23020 Prosto di Piuro SO IT

Ph +39 0343 37445 +39 0343 30974

www.3endt.eu info@3ndt.eu